

# iGate – Nice Idle Screen

Version 1.0

---



## CONTENTS

|  |     |
|--|-----|
| 1. How the manual is organized.....        | 2   |
| 2. Introduction to iGate.....              | 2   |
| 3. Installation and Uninstallation .....   | 3   |
| 3.1 Installation for Pocket PC .....       | 3   |
| 3.2 Uninstallation for Pocket PC .....     | 3   |
| 4. How to use iGate .....                  | 4-6 |
| 4.1 iGate's ideas .....                    | 4   |
| 4.2 How to active iGate.....               | 5   |
| 4.3 Emergency and backup number Call ..... | 6   |
| How to purchase and register iGate .....   | 7-8 |

## 1. How the manual is organized

---

This manual guide provides detailed information about the different components of the product, its functions as well as instruction of purchase and support.

| Symbol   | Descriptions             |
|--|--------------------------|
|  Text | Special Notes            |
|  Text | Introduction of function |

## 2. Introduction of iGate

---

iGate is the first password program on Windows Mobile 6.0 or 6.1 platform with very nice idle screen.

**iGate especially supports the following key features:**

- Support all screen resolution (including 320x320, 240x400, 400x240, 480x800, 800x480, 240x240, 240x320 and 320x240).
- Customize idle screen with LAP Technology.
- The most important information on one screen (including owner information, date time, miss call, unread message, unread email, coming appointment, ...) .
- Auto lock after device unused for predefined time.
- Support call to emergency phone number and call to backup phone number of device's owner.
- Auto check password.

### 3.1 Installation for Pocket PC


---

*Requirements:* The product needs **1 MB** of free space. You need to have MS Active Sync Software on your device and make sure your device is connecting with Desktop PC.

1. Unzip downloaded file to a folder with a zip tool. The popular unzip program **WinZip** is available at [www.winzip.com](http://www.winzip.com)
2. Run setup and follow instructions
3. When finished, go to **Start Menu >> Program**, here you will see the symbols of **iGate Settings**

We recommend storing in the **Main memory** when the installation asks to select **Main memory** or **Storage Card**.

---

 You can copy the CAB file to your device and run the CAB file directly but it will automatically install the software to the main memory.

---

### 3.2 Uninstallation

---

To remove the product from your Pocket PC:


1. Go to **Start menu >> Settings**
2. Open **System** and tap on **Remove Programs**
3. Select **iGate - Nice Idle Screen** from the list and tap on the **Remove** button
4. Choose **"Yes"** to confirm removing

## 4. How to use iGate


---

### 4.1 iGate's ideas

Normally, when activate system password by go to **Start Menu > Settings > Lock** as following:

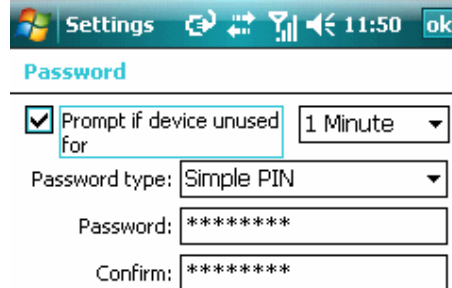


After device unused for predefined time ("1 Minute" in this example) an idle screen will appear and prompt you to enter a logging password as below:

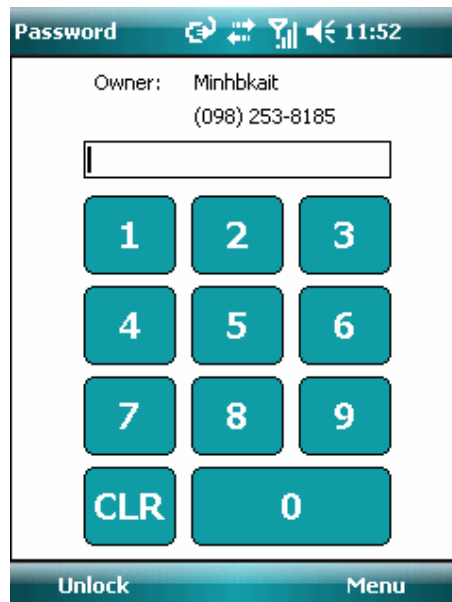

This idle screen is quite simple and we think that it can be better if we replace this screen with the nice screen contains useful information. That is the why iGate is born

**Notes:** (only the screen - start up screen is not customized) while remain all the steps that needed to set up a password as the original one.

A sample of new idle screen as following:

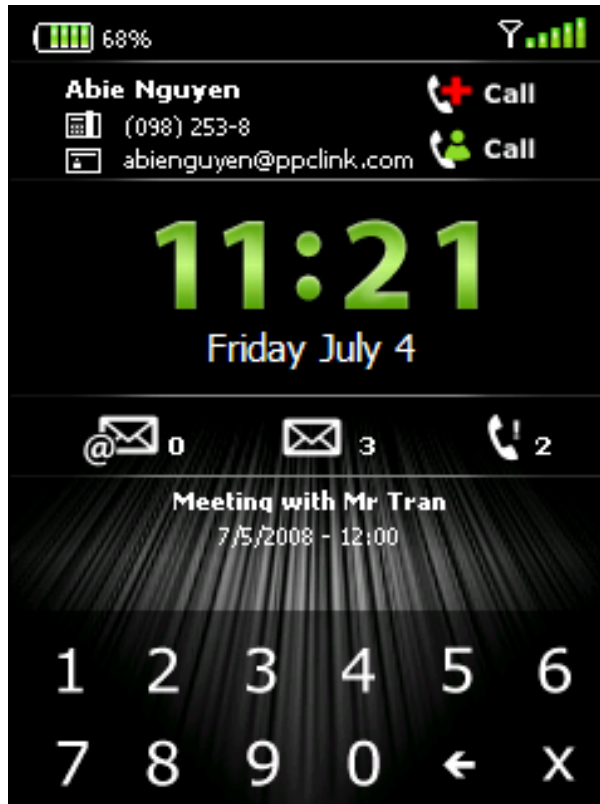

## 4.2 How to active iGate

1. Disable System's password
2. Download and install iGate to your device
3. After installing please go to Start menu>> programs folder and then run iGate's settings
4. Tap on Set up password and set the password and time to active iGate. *(The password only accept numeric [0-9], Alphabet characters is not supported)*
5. Wait for time out to see if iGate can active and enter password to see if it can go-in.

### 4.3 Call emergency and backup phone number

Normally, when system password is activated (by go to **Start Menu > Settings > Lock**). If you lost your device, the person who found it want to call for the device owner but the device is locked.

In this case, he can reach you by using emergency number, of course he can reach you by email also.

**You can change the numbers by :**

1. Go to **Start Menu > Programs > iGate Settings**.
2. Select Information Tab.
3. Type new numbers.
4. Choose OK button or "**Save & Exit**" item on Tools menu to save your change.

If your Pocket PC does not have phone function, you can remove emergency and backup phone item on screen as below steps:

1. Go to Start Menu > Programs > iGate Settings.
2. Choose Information Tab.
3. Uncheck "Show call emergency" and "Show call to other PN of owner".
4. Choose OK button or "Save & Exit" item on Tools menu to save your change.

## 5. Customize iGate's Skin

---

We will give you a tool to create iGate Skin soon, please go back our site often to get the latest news about the tool.

## **How to buy and register iGate**


iGate – Nice Idle Screen is shareware product and it is free for 14 days while after that you have to register.

To register the software, order the product from product home page:

<http://www.ppclink.com/?ppclink=product&do=view&id=63>

And our distributors

---

 From the above addresses, we offer the same standard price. However, the price can vary at times between the addresses due to sale promotions.


---

\* If you purchase directly from our websites at [www.ppclink.com](http://www.ppclink.com), you will receive an account by which you can download upgraded versions, submit questions as well as get access to our direct support. After purchasing, you will receive an email from **2CheckOut** and we will send you account information you should use to login to our website: <http://www.ppclink.com/?ppclink=member> to get the Serial Key. In case this is lost, you can re-login and receive a new one.

After receiving the registration key, unlock the product:

1. Go to **Start menu >> Programs** then tap on **iGate Settings** icon to start.
2. Select Register item on Tools Menu.
3. Enter registration key and select Register Button.

---

 The Name on iGate about box is not changeable, if you wish to change the owner name please go to **Start menu >> Settings >> Owner Information**

---

After successfully completing registration, please write down the name and number and store in a safe place. You will need the registration key if you are going to reinstall the software in a new device or in case your device is hard-reset. You can obtain support information or answers to frequently asked questions at:

<http://www.ppclink.com/?ppclink=product&do=view&id=63>

If you have any further questions, please do not hesitate to contact us at:

**PPCLINK Support**      [support@ppclink.com](mailto:support@ppclink.com)

**License**              [license@ppclink.com](mailto:license@ppclink.com)

**Online support**      <http://www.ppclink.com/?ppclink=member>